


BATERIAS AUTOMATICAS CON FILTROS / AUTOMATIC CAPACITOR BANKS WITH FILTERS

# BATLVF120

## CON CONTACTORES ESTÁNDAR WITH STANDARD CONTACTORS

25 ... 120 kvar

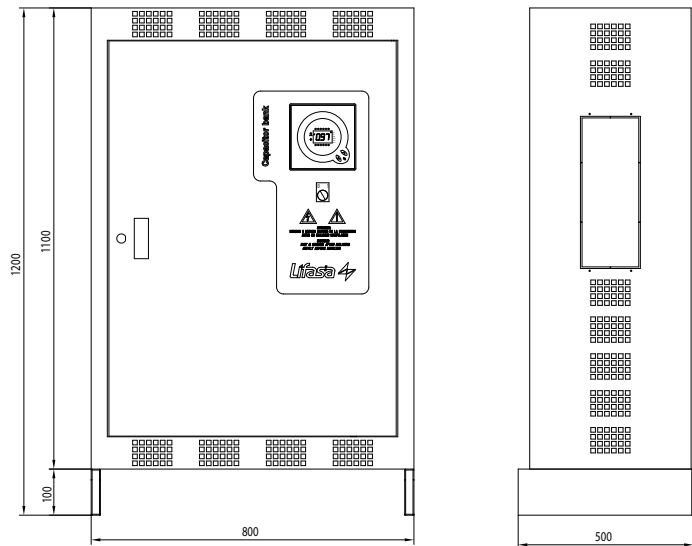

### CARACTERÍSTICAS TÉCNICAS/TECHNICAL CHARACTERISTICS

- Tensión nominal/Rated voltages.....440 V 50 Hz - 60 Hz
- Regulador/Controller.....Master
- Programa trabajo/Working program.....10 opciones/options
- Condensador/Capacitors.....Tipo/Type POLB HD 7%
- Reactancias/Reactors.....Tipo/Type INR/INA
- Protección esc./Protection steps.....Int. Automático/  
Circuit breaker
- Grado IP/Degree of protection.....IP21
- Color/Colour.....Gris/Grey RAL 7035
- Instalación/Installation.....Interior/Indoor
- Montaje/Assembly.....Sobre suelo/  
Floor mounting
- TI externo/External TI......../5 (no incluido/  
not included)
- Dimensiones/Dimensions.....800x1200x500mm

### ACCESORIOS/ACCESSORIES

- Protección diferencial / Leakage protection

| Referencia<br>Part Number | Q <sub>n</sub> (kvar)<br>440V | Q <sub>n</sub> (kvar)<br>400V | Composición<br>Composition | Escalones<br>Steps | Programa<br>Program | Peso (kg)<br>Weight |
|---------------------------|-------------------------------|-------------------------------|----------------------------|--------------------|---------------------|---------------------|
| BATLVF12440250            | 25                            | 20.7                          | 2 x 6.25 + 12.5            | 4 x 6.25           | 1.1.2.              | 80                  |
| BATLVF12440312            | 31.25                         | 25.8                          | 6.25 + 2 x 12.5            | 5 x 6.25           | 1.2.2.              | 82                  |
| BATLVF12440437            | 43.75                         | 36.2                          | 6.25 + 12.5 + 25           | 7 x 6.25           | 1.2.4.              | 84                  |
| BATLVF12440500            | 50                            | 41.3                          | 2 x 12.5 + 25              | 4 x 12.5           | 1.1.2.              | 85                  |
| BATLVF12440625            | 62.5                          | 51.7                          | 12.5 + 2 x 25              | 5 x 12.5           | 1.2.2.              | 86                  |
| BATLVF12440750            | 75                            | 62.0                          | 2 x 12.5 + 2 x 25          | 6 x 12.5           | 1.1.2.              | 90                  |
| BATLVF12440875            | 87.5                          | 72.3                          | 12.5 + 3 x 25              | 7 x 12.5           | 1.2.2.              | 95                  |
| BATLVF12440900            | 90                            | 74.4                          | 2 x 15 + 2 x 30            | 6 x 15             | 1.1.2.              | 104                 |
| BATLVF12441050            | 105                           | 86.8                          | 15 + 3 x 30                | 7 x 15             | 1.2.2.              | 121                 |
| BATLVF12441200            | 120                           | 99.2                          | 4 x 30                     | 4 x 30             | 1.1.1.              | 128                 |

Otras composiciones, tensiones y frecuencias, consultar/Other ratings, voltages and frequencies available on request.